

Europäische Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 925 958 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
30.06.1999 Bulletin 1999/26

(51) Int. Cl.<sup>6</sup>: B60C 23/04

(21) Application number: 98123155.8

(22) Date of filing: 04.12.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 22.12.1997 US 996420

(71) Applicant:  
BRIDGESTONE/FIRESTONE, Inc.  
Akron, Ohio 44317-0001 (US)

(72) Inventor: Hamaya, Hiromi  
Cuyahoga Falls, OH 44223 (US)

(74) Representative:  
von Raffay, Vincenz, Dipl.-Ing.  
Patentanwälte  
Raffay, Fleck & Partner  
Postfach 32 32 17  
20117 Hamburg (DE)

### (54) Method and apparatus for monitoring conditions of a vehicle tire

(57) A method for monitoring various physical conditions of pneumatic tires (5) and to a tire which includes a memory device (10) mounted on the interior (12) of the tire within the pressurizable cavity and a separate monitoring device (8) mounted on the tire rim (16). The memory device contains a battery, an antenna and stored data pertaining to the tire. The monitoring device uses an active self-powered programmable electronic circuitry which obtains data from the memory device and in addition contains one or more sensors which obtains engineering conditions such as temperature, pressure, tire rotation and/or other operated conditions of the pneumatic tire along with the stored information from the memory device. The memory device can be actuated by externally transmitted radio frequency waves from a remote location or by signals from the monitoring device, and the monitoring device can transmit the information to the remote location by a separate, larger and more powerful battery (42) which is mounted on the tire rim (16) than the battery in the memory device.

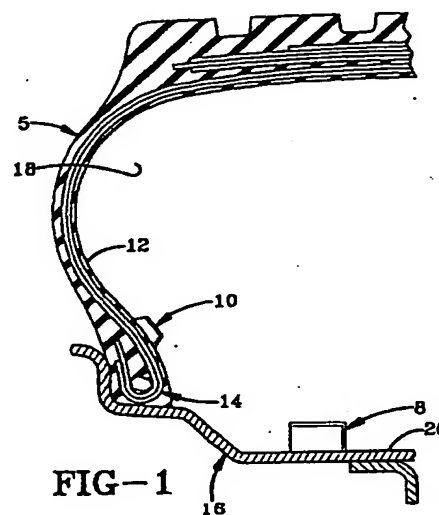


FIG-1

EP 0 925 958 A2

## Description

### BACKGROUND OF THE INVENTION

#### Technical Field

[0001] The invention relates to a method for monitoring various physical conditions of a pneumatic tire and to a tire having a memory device containing stored information relating to the tire, and a monitoring device. More particularly, the invention relates to a method and tire construction in which the memory device attaches to the tire innerliner and contains electronics to maintain stored data regarding the tire, preferably an antenna and a low powered battery to transmit and receive data to and from the monitoring device mounted on the tire rim. The monitoring device incorporates a sensing package to interpret temperature and pressure of the tire and has a larger longer life battery than the memory device for communicating with the memory device within the tire and for transmitting and receiving data to and from a source remote. These two separate devices enable the memory device on the tire to be reduced in size and cost and provides a longer service life thereto.

#### Background Information

[0002] It is desirable to monitor the condition of tires as to wear, internal temperature and internal pressure. It is particularly advantageous to monitor large truck tires since these are expensive and must be regularly maintained to maximize vehicle efficiency. In the past, such monitoring activities have generally used a passive integrated circuit embedded within the body of the tire and activated by a radio frequency transmission which energizes the circuit by inductive magnetic coupling. Passive devices which rely on inductive magnetic coupling or capacitive coupling generally have the disadvantage of requiring lengthy coil windings, thus requiring major modifications in the tire construction and assembly process. Another serious disadvantage with such passive devices is that the interrogator must be positioned in very close proximity to the tire, usually within a few inches of the tire, in order to allow communication between the tire and the device. Because of the proximity requirements, continuous monitoring is impractical since it would require that an interrogator be mounted at each wheel of the vehicle. Manual acquisition of data from the passive devices embedded in each of the tires of a parked vehicle is also cumbersome and time consuming because of the proximity requirements.

[0003] Other prior art devices used for monitoring tire conditions have comprised self-powered circuits which are positioned external of the tire, such as at the valve stem. Externally mounted devices have the disadvantage of being exposed to damage, such as from weather and vandalism. Another disadvantage with installing devices external of the tire is that the device itself intro-

duces additional sealed joints from which air may leak. Additionally, externally installed devices can easily become disassociated from a particular tire which is being monitored.

5 [0004] Another disadvantage with known tire monitoring and identification devices is that communication transmissions are achieved using conventional radio frequencies which generally require a relatively large antenna which must be mounted externally or secured to the tire in such a manner which requires relatively major modifications in the tire construction or assembly process.

10 [0005] Many of these problems have been eliminated by the method and tire construction shown and described in U.S. Patent Nos. 5,500,065; 5,562,787; 5,573,610 and 5,573,611. However, for certain applications and tire constructions, especially when the tire will be retreaded, it is desirable to protect the sensors from excessive heat which occurs during the retreading process, and for certain applications to provide the tire with only a part of the complete monitoring package by providing a simplified memory device which can be incorporated into the tire either at manufacture or applied after manufacture, and used with or without more detailed sensors depending upon the particular application in which the tire will be utilized.

15 [0006] Although the method and tire monitoring devices shown and described in the above four mentioned patents provide many advantages over the prior art, it is desirable to provide for a tire monitoring system which provides greater versatility by embedding only certain components within the tire at the time of manufacture or separately applying the same to the tire after manufacture, which components are less susceptible to damage by heat and wear, for example, during vulcanization and retreading of the tire, yet which are adapted to be compatible with other components of the monitoring system, which components need not be permanently installed within the tire at time of manufacture, and which most importantly enables a larger and longer life power source to be utilized than is achievable with prior art monitoring systems.

#### SUMMARY OF THE INVENTION

20 [0007] In accordance with one aspect of the present invention, a method of monitoring tires is provided in which an activatable memory device or tag is mounted within at least one tire of a vehicle on the inner surface thereof, which device contains stored data pertaining to the tire, and in which the memory device is activated by means of a monitoring device mounted on the tire rim within the pressurizable cavity formed within the tire.

25 [0008] Another objective of the invention is to provide such a method and tire construction in which the memory device has a relatively low power battery and an antenna for transmitting the stored data either directly to an external source or to the monitoring device mounted

within the tire cavity; and in which the monitoring device has a larger power source or battery than that within the memory device for transmitting the stored data from the memory device to a remote location.

[0009] Another objective is to provide such a method and tire construction in which the monitoring device contains sensors for sensing engineering conditions of the tire such as internal pressure and temperature, which information is also transmitted to a remote location through a separate antenna located at the monitoring device.

[0010] A still further objective is to provide such a method and tire construction in which the antenna of the monitoring device may be located entirely within the pressurizable cavity or may extend through the tire rim so as to terminate externally thereof, thereby requiring less power to transmit the stored and sensed data to an external source than would be required if the antenna were located entirely within the pressurizable cavity of the tire due to the interference caused by the surrounding steel belts and tire rim.

[0011] A further objective of the invention is to provide such a method and tire construction in which the antenna of the monitoring device when extending through the rim external to the pressurizable cavity can be provided with various lengths in order to tune the antenna to match that of a particular interrogator located at a remote location.

[0012] Another objective of the invention is to provide such a method and tire construction in which the battery of the monitoring device may be mounted externally on the tire rim and removably connected electrically and physically to the other components of the memory device which are mounted on the rim within the pressurizable cavity thereby enabling easy replacement of the battery should it become weak without requiring removal or deflation of the tire with respect to the rim.

[0013] A still further objective is to provide such a method and tire construction in which the monitoring device includes an integrated circuitry and a programmable microprocessor for processing the electrical signals received from the sensor and when obtaining data from the memory device.

[0014] Another objective is to provide such a method and tire construction in which the memory device can be secured to the tire wall either during manufacture of the tire or secured thereto after manufacture by utilizing a chemical or heat activatable adhesive in such a manner and location to minimize stress, strain, cyclic fatigue, impact and vibration.

[0015] These objectives and advantages are obtained by the improved method of the present invention, the general nature of which may be stated as a method for monitoring at least one condition of a pneumatic tire which is mounted on a rim forming an internal pressure cavity, said method comprising the steps of providing the tire with a memory device which provides for the storage of data pertaining to the tire; securing the mem-

ory device to the tire within said internal pressure cavity; providing a monitoring device which includes a sensor, an amplifier, a first antenna, a first power source and a control circuit for sensing the tire data stored in the memory device; securing the monitoring device on the rim remote from the memory device; transmitting the stored data from the memory device to the monitoring device; and retransmitting the stored data from the monitoring device to a remote location.

[0016] These objectives and advantages are further obtained by the tire construction of the present invention, the general nature of which may be stated as a tire mounted on a rim defining a pressurizable cavity between the tire and rim and having means for monitoring the tire, said monitoring means including a memory device mounted on the tire within the pressurizable cavity and containing stored data pertaining to the tire; a monitoring device spaced from the memory device mounted on the rim, said monitoring device including a first battery, an amplifier, a control circuit for sensing the stored data in the memory device, and a first antenna for transmitting the stored data to a location remote from the tire.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0017] Preferred embodiments of the invention, illustrative of the best mode in which applicant has contemplated applying the principles, are set forth in the following description and are shown in the drawings and are particularly and distinctly pointed out and set forth in the appended claims.

FIG. 1 is a fragmentary diagrammatic cross-sectional view of one-half of a pneumatic tire with the memory device mounted on the innerliner thereof and the monitoring device mounted on the rim within the pressurizable cavity of the tire;

FIG. 2 is a block diagram of the components of the memory device;

FIG. 3 is a block diagram of the components of the monitoring device; and

FIG. 4 is a fragmentary sectional view of a modified mounting arrangement of the monitoring device on the tire rim.

[0018] Similar numerals refer to similar parts throughout the drawings.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

[0019] Referring to FIG. 1 of the drawings, there is shown a partial sectional view of a pneumatic tire 5 having a memory device 10 secured to the inner wall or liner 12 in a region closely adjacent the bead package 14. Tire 5 is mounted on a usual metal rim indicated generally at 16, which forms an internal pressure chamber of cavity 18 which receives a supply of air through a

usual valve for inflating the tire. The preferred location of memory device 10, as discussed in U.S. Patent Nos. 5,500,065; 5,562,787; 5,573,610 and 5,573,611, the contents of which are incorporated herein by reference, is a distance of about 1 to 2 inches above the toe bottom of the tire in order to reduce cyclic strain thereon.

[0020] As diagrammatically represented in FIG. 2, memory device 10 preferably includes an antenna 20, a battery 22 and an electronic chip indicated at 24, which contains stored data, such as identification information pertaining to the particular tire on which memory device 10 is mounted.

[0021] Memory device 10 may be assembled with the tire during its manufacture or secured thereto by a solvent or heat activatable adhesive such as described in the four previously identified patents. Also if desired, monitoring device 10 may not have its own battery 22 or antenna 20 but could contain an appropriate electronic circuit which could be activated by an external signal thereby providing for an even smaller and less expensive device than would be required if it contains its own battery and antenna.

[0022] In accordance with one of the main feature of the invention, a separate monitoring device indicated generally at 8 is mounted on inside surface 26 of rim 16. Monitoring device 8 (FIG. 3) preferably is encased within an encapsulating material 28 so as to be less affected by the ambient temperature, pressures and other harsh environment to which it may be exposed. Device 8 preferably includes a battery 30, an antenna 32, a microchip 34 containing the appropriate electronic control circuitry which is connected with and operated by an amplifier 36. Preferably a sensor 38 is included in device 8 and communicates with chamber 18 so as to sense an engineering condition of the tire, such as the internal temperature and/or pressure. Sensor 38 is connected through the circuitry of microchip 34 and amplifier 36, which information is then transmitted by antenna 32 to a remote interrogating unit. This interrogating unit preferably will be located in the cab of a truck or could be remotely located at a completely external location which is operable when the tire or vehicle is in the vicinity thereof. The details of microchip 34, amplifier 36 and sensor 38 preferably are the type which are described in detail in the four previously mentioned patents, and thus are not described in further detail.

[0023] FIG. 4 shows a modified monitoring device 40 which is mounted on rim 16 as is device 8. However, battery 42 thereof is connected to the microchip, amplifier, sensor and antenna through connectors 44 which preferably extend through openings in rim 16. Antenna 32 extends through a sealing grommet 46 to a position externally of cavity 18.

[0024] In accordance with one of the main features of the invention, monitoring devices 8 and 40 are separate components spaced from memory device 10 enabling them to be mounted on the tire rim with the battery being either internal or external with respect to the pres-

surizable cavity 18 thereby rendering them unaffected by the high temperatures which the tire incurs during its initial manufacture and vulcanization and subsequent retreading, which is common in larger truck size tires. Also, the particular microchip and sensor thereof need not be dedicated to a particular tire but can be changed to achieve various results without specific regards to the particular tire on which it will be mounted.

[0025] Most importantly, monitoring devices 8 and 40, and in particular batteries 30 and 42 thereof, can be considerably larger and have greater power output than battery 22 of memory device 10. This simplifies memory device 10 and reduces considerably its cost and size over the memory devices of prior art monitoring systems. Also, batteries 30 and 42 can be larger and more powerful since they will not effect the ride provided by the tire since they are usually mounted centrally on rim 16 and not located on one side of the tire as is device 10. Also, they are unaffected by the heat of vulcanization and can be replaced easier than if formed as an integral component of the memory device which may be formed as an integral part of the tire. Most importantly, the embodiment shown in FIG. 4 wherein battery 42 is located externally of cavity 18 on the outer surface of the rim, enables the battery to be easily replaced through its connectors 44 without even deflating the tire, and most importantly without having to remove the tire from the rim as is required in prior art monitoring systems wherein the battery is mounted on the interior of the tire.

[0026] Another important advantage of the monitoring system of the present invention is the placement of antenna 32 exteriorly of cavity 18 by feeding it through a grommet 46 or other type of protected seal in the tire, such as the inflation stem. This enables battery 42 to consume less power to transmit the information to a remote interrogator since it is not surrounded by the usual steel belts of a tire as in prior art systems wherein the antenna is located entirely within cavity 18. Furthermore, the antenna can be "tuned" by varying the length thereof since it is readily accessible exteriorly of the tire. Again, one of the most important features is the ability to use a larger and more powerful battery since it is mounted as a separate component on the rim, and which is easily replaced should it become damaged or after loss of life, and that the components of monitoring device 8 and 40 may not be dedicated to a particular tire which is mounted on the rim. Furthermore, even if the same size battery is utilized in monitoring devices 8 and 40 as incorporated into prior art memory devices such as device 10, it will have a longer service life since it is less affected by heat and the harsh surrounding environment, and especially when the antenna is located externally of the tire cavity as shown in FIG. 4.

[0027] It is also readily apparent that memory device 10 could be activated directly by an outside interrogator and functions without its own internal battery, although the use of a low power battery and antenna contained

within the device is preferable since the same can be achieved relatively inexpensive and will provide increased versatility thereto. Another advantage is that memory device 10, due to its low cost of production and installation, will have a particular memory pertaining to the tire in which it is affixed and need not be erased and reprogrammed when put on a different rim and will remain on the tire throughout its life. Again, the chief advantage is that the monitoring system is more versatile since it is not limited by battery size and power as in those installations in which the battery is part of the device mounted directly on the tire thereby providing increased flexibility and ease of maintenance than heretofore possible with known prior art tire monitoring systems and apparatus.

[0028] Accordingly, the improved method and apparatus for monitoring conditions of a vehicle tire is simplified, provides an effective, safe, inexpensive, and efficient device and method which achieves all the enumerated objectives, provides for eliminating difficulties encountered with prior devices and methods, and solves problems and obtains new results in the art.

[0029] In the foregoing description, certain terms have been used for brevity, clearness and understanding; but no unnecessary limitations are to be implied therefrom beyond the requirement of the prior art, because such terms are used for descriptive purpose and are intended to be broadly construed.

[0030] Moreover, the description and illustration of the invention is by way of example, and the scope of the invention is not limited to the exact details shown or described.

[0031] Having now described the features, discoveries and principles of the invention, the manner in which the improved method and apparatus for monitoring conditions of a vehicle tire is constructed and used, the characteristics of the construction, and the advantageous, new and useful results obtained, the new and useful structures, devices, elements, arrangements, parts and combinations and method steps, are set forth in the appended claims.

#### Claims

1. A method of monitoring at least one condition of a pneumatic tire which is mounted on a rim forming an internal pressure cavity, said method comprising the steps of:

providing the tire with a memory device which provides for the storage of data pertaining to the tire;  
 securing the memory device to the tire within said internal pressure cavity;  
 providing a monitoring device which includes a sensor, an amplifier, a first antenna, a first power source and a control circuit for sensing the tire data stored in the memory device;

securing the monitoring device on the rim remote from the memory device;  
 transmitting the stored data from the memory device to the monitoring device; and  
 retransmitting the stored data from the monitoring device to a remote location.

2. The method defined in Claim 1 wherein the memory device is secured to the innerliner of the tire.
3. The method defined in Claim 1 including the step of securing the sensor, amplifier and first antenna to the rim within the pressure cavity of the tire.
4. The method defined in Claim 3 including the further step of securing the first power source on the rim externally of the pressure cavity of the tire.
5. The method defined in Claim 1 including the step of providing the memory device with a second antenna and a second power source.
6. The method defined in Claim 5 including the step of transmitting the stored data from the memory device to the remote location by using the second antenna and second power source.
7. The method defined in Claim 3 including the step of extending the first antenna through the rim from within the pressure cavity to a location externally of said rim.
8. The method defined in Claim 1 including the step of bonding the memory device to the innerliner of the tire within the pressure cavity after finished molding of said tire.
9. The method defined in Claim 1 including the step of using radio frequency (RF) for transmitting the stored data from the memory device.
10. A tire mounted on a rim and defining a pressurizable cavity between the tire and rim and having means for monitoring the tire, said monitoring means including:

a memory device mounted on the tire within the pressurizable cavity and containing stored data pertaining to the tire;

a monitoring device spaced from the memory device mounted on the rim, said monitoring device including a first battery, an amplifier, a control circuit for sensing the stored data in the memory device, and a first antenna for transmitting the stored data to a location remote from the tire.





11. The tire as defined in Claim 10 wherein the memory


device is secured to an innerliner of the tire in the vicinity of a tire bead.

12. The tire as defined in Claim 10 wherein the first battery, the amplifier and control circuit are mounted on the rim within the pressurizable cavity. 5
13. The tire as defined in Claim 10 wherein the monitoring device includes a sensor which communicates with the pressurizable cavity for sensing a engineering condition of the tire. 10
14. The tire as defined in Claim 10 wherein the memory device includes a second battery and a second antenna for transmitting the stored data contained in said memory device. 15
15. The tire as defined in Claim 10 wherein the first antenna extends through the rim and terminates externally of the pressurizable cavity. 20
16. The tire as defined in Claim 10 wherein the control circuit and amplifier are located within the pressurizable cavity; and in which the first battery is mounted on the rim externally of the pressurizable cavity. 25
17. The tire as defined in Claim 16 wherein the first battery is removably mounted on the rim. 30
18. Apparatus for monitoring a pneumatic tire comprising:  
a memory device including a first antenna, amplifier and power source and containing stored data pertaining to a particular tire in which the device is adapted to be mounted within a pressure chamber of the tire; and  
a separate monitoring device adapted to be mounted on a rim on which the tire is mounted, said monitoring device including a second antenna, amplifier and power source, control circuit and sensor means for sensing a condition of the tire, said control circuit receiving the data stored in the memory device and transmitting said data to a remote location. 35  
40  
45

50

55

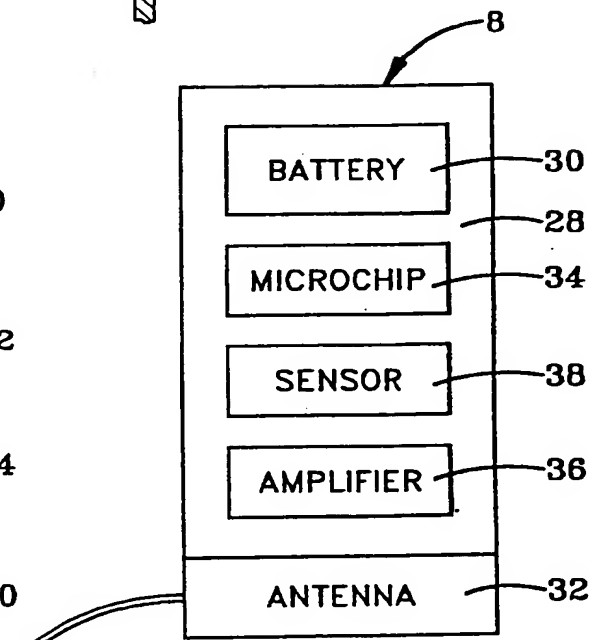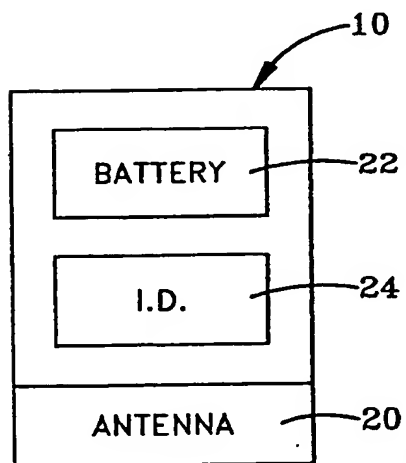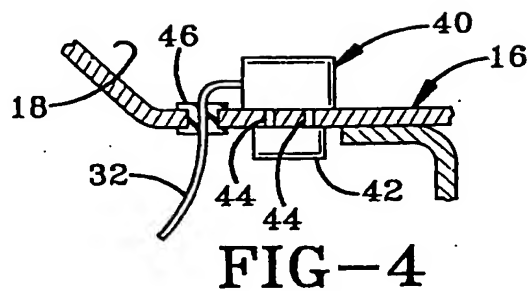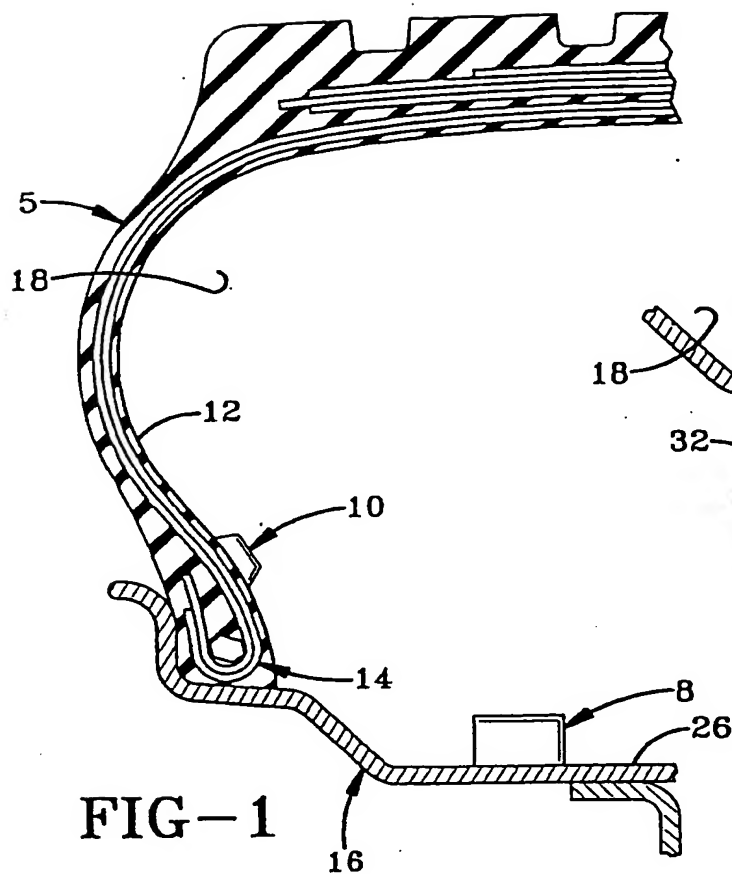



(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
02.10.2002 Bulletin 2002/40

(51) Int Cl.7: B60C 23/04

(43) Date of publication A2:  
30.06.1999 Bulletin 1999/26

(21) Application number: 98123155.8

(22) Date of filing: 04.12.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Hamaya, Hiromi  
Cuyahoga Falls, OH 44223 (US)

(74) Representative: von Raffay, Vincenz, Dipl.-Ing.  
Patentanwälte  
Raffay & Fleck  
Geffckenstrasse 6  
20249 Hamburg (DE)

(30) Priority: 22.12.1997 US 996420

(71) Applicant: Bridgestone/Firestone North  
American Tire LLC  
Nashville, Tennessee 37214 (US)

(54) Method and apparatus for monitoring conditions of a vehicle tire

(57) A method for monitoring various physical conditions of pneumatic tires (5) and to a tire which includes a memory device (10) mounted on the interior (12) of the tire within the pressurizable cavity and a separate monitoring device (8) mounted on the tire rim (16). The memory device contains a battery, an antenna and stored data pertaining to the tire. The monitoring device uses an active self-powered programmable electronic circuitry which obtains data from the memory device and in addition contains one or more sensors which obtains engineering conditions such as temperature, pressure, tire rotation and/or other operated conditions of the pneumatic tire along with the stored information from the memory device. The memory device can be actuated by externally transmitted radio frequency waves from a remote location or by signals from the monitoring device, and the monitoring device can transmit the information to the remote location by a separate, larger and more powerful battery (42) which is mounted on the tire rim (16) than the battery in the memory device.

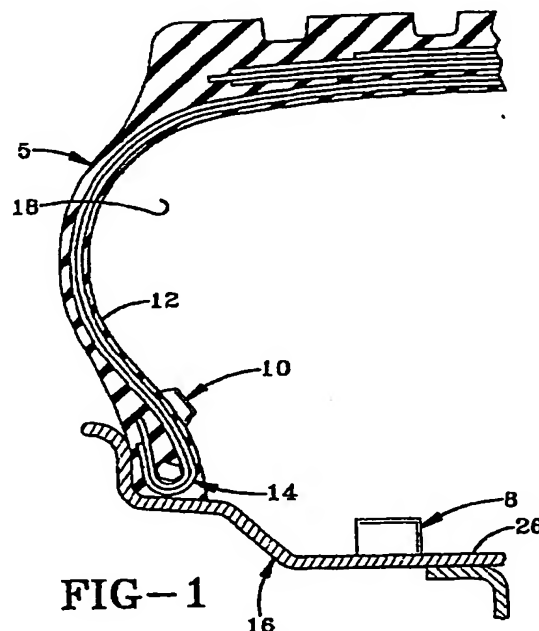


FIG-1

EP 0 925 958 A3





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 12 3155

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A, D	US 5 573 610 A (OKAMOTO KEIZO ET AL) 12 November 1996 (1996-11-12) * abstract * * column 2, paragraphs 1-4 * * column 4, paragraph 1 * * claim 2 * * figure 1 *	1-3, 8-13, 18	B60C23/04
A	DE 41 00 472 C (TEXAS INSTRUMENTS DEUTSCHLAND GMBH, FREISING, DE) 23 July 1992 (1992-07-23) * abstract * * column 2 * * column 3, paragraph 4 * * figure 1 *	1, 3, 6, 10, 13, 18	
A, P	US 5 731 754 A (KULKA HARVEY J ET AL) 24 March 1998 (1998-03-24)  * claim 24 * * column 2, line 58-60 * * column 3, paragraph 2 * * column 4, line 58-61 * * column 5 * * column 9, paragraphs 3, 4 * * figures 2, 8 *	1, 2, 8-11, 13, 16, 18	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  B60C
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>8 August 2002</b>	Examiner <b>Thanbichler, P</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : early patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 12 3155

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5573610      A	12-11-1996	US 5500065 A	19-03-1996
		AU 694200 B2	16-07-1998
		AU 2030295 A	14-12-1995
		AU 703974 B2	01-04-1999
		AU 6596998 A	16-07-1998
		BR 9502667 A	02-01-1996
		CA 2150865 A1	04-12-1995
		DE 69509305 D1	02-06-1999
		DE 69509305 T2	02-09-1999
		EP 0689950 A2	03-01-1996
		ES 2130524 T3	01-07-1999
		JP 8067117 A	12-03-1996
		NZ 272255 A	26-06-1998
		NZ 330236 A	26-06-1998
		NZ 330237 A	26-06-1998
		NZ 330238 A	28-07-1998
		US 5573611 A	12-11-1996
		US 5562787 A	08-10-1996
		ZA 9504299 A	24-01-1996
DE 4100472      C	23-07-1992	DE 4100472 C1	23-07-1992
		AT 138017 T	15-06-1996
		DE 69210632 D1	20-06-1996
		DE 69210632 T2	26-09-1996
		EP 0494763 A1	15-07-1992
		US 5513525 A	07-05-1996
		US 5235850 A	17-08-1993
US 5731754      A	24-03-1998	US 5483827 A	16-01-1996
		AU 705274 B2	20-05-1999
		AU 5186296 A	02-10-1996
		BR 9607632 A	26-05-1998
		CA 2214700 A1	19-09-1996
		CN 1181039 A , B	06-05-1998
		EP 0812270 A1	17-12-1997
		JP 11504585 T	27-04-1999
		WO 9628311 A1	19-09-1996

EPO FORM P0439  
For more details about this annex : see Official Journal of the European Patent Office, No. 12/82